


Panasonic ideas for life



S P E C F I L E

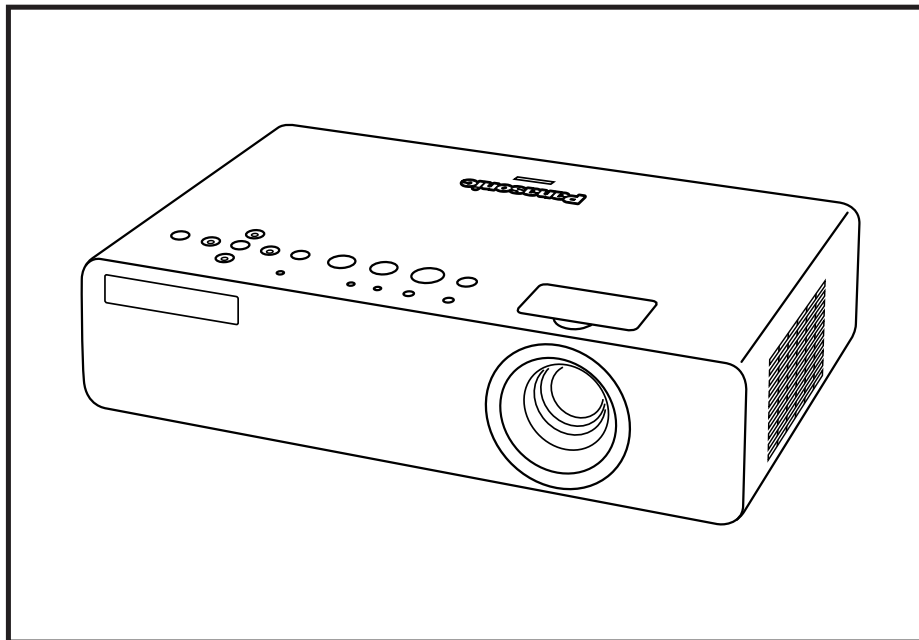

Product Number : **PT-LB78V**

Product Name : LCD Projector

Specifications

Power supply	100–240 V AC, 50/60 Hz
Power consumption	300 W (0.9 W*1 in standby eco mode. 15 W in normal standby mode. 18 W in normal standby mode when set to audio monitor out and with fan stopped.)
Optical system	Dichroic mirror separation/prism synthesis system
LCD panel	0.63" (16 mm) diagonal (4:3 aspect ratio)
Panel size	Transparent LCD panel (x 3, R/G/B)
Display method	Active matrix
Drive method	786,432 (1,024 x 768) x 3, total of 2,359,296 pixels
Pixels	Stripe
Pixel configuration	Manual zoom (1:1–1:1.2), manual focus
Lens	F 1.65–1.93, f 18.53–22.18 mm
Throw ratio	1.4–1.7:1
Lamp	220 W UHM lamp
Projection size	838–7,620 mm (33–300 inches) diagonally, 4:3 aspect ratio
Colors	Full color (16,777,216 colors)
Brightness*2	3,000 lumens
Center-to-corner uniformity ratio*2	85%
Contrast ratio*2	500:1 (full on/full off)
Resolution RGB	1,024 x 768 pixels (Input signals that exceed this resolution will be converted to 1,024 x 768 pixels.)
Scanning frequency	Horizontal: 15.00–91.00 kHz, Vertical: 50–85 Hz
RGB	480i (525i): fH 15.75 kHz; fV 60 Hz
YPbPr	576i (625i): fH 15.63 kHz; fV 50 Hz
	480p (525p): fH 31.50 kHz; fV 60 Hz
	576p (625p): fH 31.25 kHz; fV 50 Hz
	720/60p (750p): fH 45.00 kHz; fV 60 Hz
	720/50p (750p): fH 37.50 kHz; fV 50 Hz
	1080/60i (1125i): fH 33.75 kHz; fV 60 Hz
	1080/50i (1125i): fH 28.13 kHz; fV 50 Hz
	NTSC, NTSC4.43, PAL-M, PAL60: fH 15.75 kHz; fV 60 Hz
	PAL, SECAM, PAL-N: fH 15.63 kHz; fV 50 Hz
	5:1 (fixed)
Optical axis shift	Approx. ±30° vertically
Keystone correction range	17 languages: English, French, German, Spanish, Italian, Korean, Russian, Chinese, Japanese, Swedish, Norwegian, Danish, Portuguese, Polish, Hungarian, Czech, and Thai
On-screen menu	Front/rear, ceiling/desk (menu selection)
Installation	4 x 2 cm, x 1, oval
Built-in speakers	1.0 W (monaural)
Size	D-sub HD 15-pin (female) x 1
Output power	G: 0.7 V [p-p] (1.0 V [p-p] for sync on green signals), 75 ohms,
Terminals	R, B: 0.7 V [p-p], 75 ohms, HD/SYNC, VD: TTL (positive/negative polarity compatible)
COMPUTER (RGB) 1 IN	Y: 1.0 V [p-p] (including sync signal), 75 ohms,
RGB signal	Pb, Pr: 0.7 V [p-p], 75 ohms
YPbPr signal	D-sub HD 15-pin (female) x 1
COMPUTER (RGB) 2 IN	G: 0.7 V [p-p] (1.0 V [p-p] for sync on green signals), 75 ohms,
RGB signal	R, B: 0.7 V [p-p], 75 ohms, HD/SYNC, VD: TTL (positive/negative polarity compatible)
YPbPr signal	Y: 1.0 V [p-p] (including sync signal), 75 ohms,
	Pb, Pr: 0.7 V [p-p], 75 ohms
VIDEO IN	RCA pin x 1, 1.0 V [p-p], 75 ohms
S-VIDEO IN	Mini DIN 4-pin x 1, Y: 1.0 V [p-p], C: 0.286 V [p-p], 75 ohms
COMPUTER (RGB) 1/2 AUDIO IN	M3 (L, R) x 1, 0.5 V [rms]
VIDEO/S-VIDEO AUDIO IN	RCA (L, R) x 1, 0.5 V [rms]
VARIABLE AUDIO OUT	M3 (L, R) x 1, 0–2.0 V [rms]
SERIAL	D-sub 9-pin x 1, for external control (RS-232C compliant)
Power cord length	2 m/6.6'
Cabinet material	Moulded plastic (PC+ABS)

Dimensions (W x H x D)		368 x 88 x 233 mm (14-1/2" x 3-15/32" x 9-3/16")* ³
Weight** ⁴		Approx. 2.96 kg (6.5 lbs.)
Operating environment	Temperature	0°–40°C (32°–104°F)
	Humidity	20%–80% (no condensation)
Remote control unit	Power supply	3 V DC (AA battery x 2)
	Operation range* ⁵	Approx. 15 m (49'3") when operated from directly in front of the signal receptor
	Dimensions (W x H x D)	48 x 163 x 24.5 mm (1-7/8" x 6-13/32" x 31/32")
	Weight** ⁴	Approx. 117 g (4.1 oz) (including batteries)
Supplied accessories		Power cord
		Power cord secure lock
		Wireless remote control
		Batteries for remote control
		VGA cable for RGB signals (1.8 m/5'11")
		Carrying bag
Optional accessories		Replacement lamp unit: ET-LAB80
		Ceiling mount bracket: ET-PKB80

*1: In standby eco mode, only certain commands can be received from RS-232C control.

*2: Measurement, measuring conditions, and method of notation all comply with ISO 21118 international standards.

*3: Protruding parts not included.

*4: Average value. May differ depending on models.


*5: Operation range differs depending on environments.

Weights and dimensions shown are approximate. Specifications are subject to change without notice. This product may be subject to export control regulations. Intel and Pentium are registered trademarks of Intel Corporation. Microsoft, Windows Vista and Windows are either registered trademarks or trademarks of Microsoft Corp. in the United States and/or other countries. Apple, Mac, Mac OS, Macintosh and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. All other trademarks are the property of their respective trademark owners. Projection images simulated.


Dimensions

unit : mm (inch)

NOTE: This illustration is not drawn to scale.

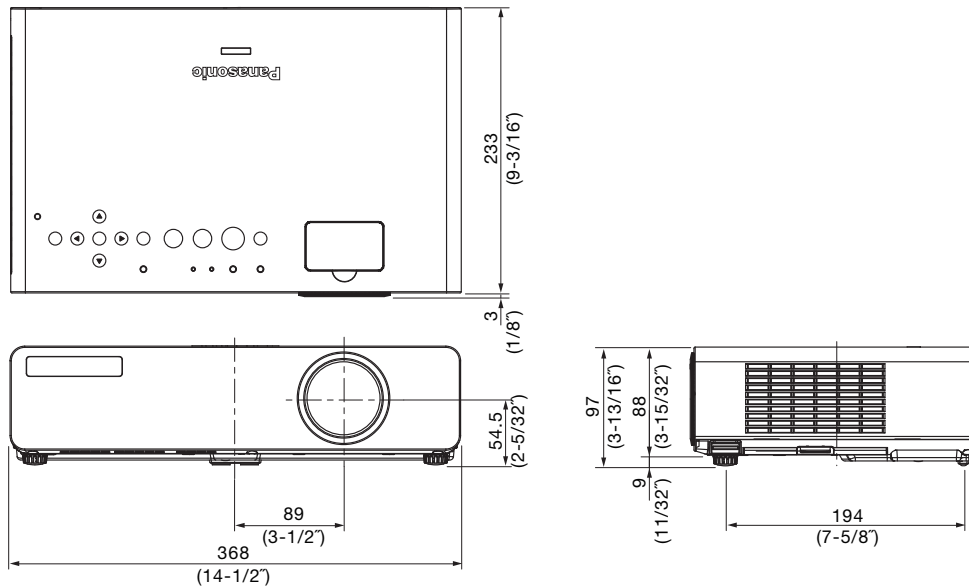


Terminals

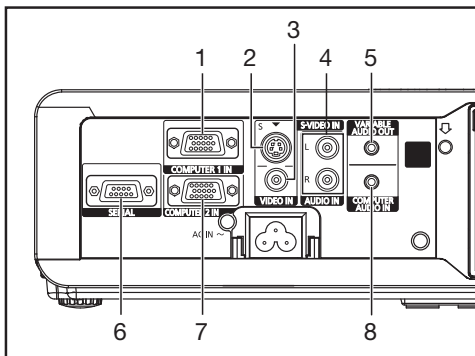

- 1 COMPUTER (RGB) 1 input
- 2 S-Video input
- 3 Video input
- 4 Audio input for Video/S-Video
- 5 Audio output
- 6 Serial input
- 7 COMPUTER (RGB) 2 input
- 8 Audio input for COMPUTER 1/2

Standard setting-up positions

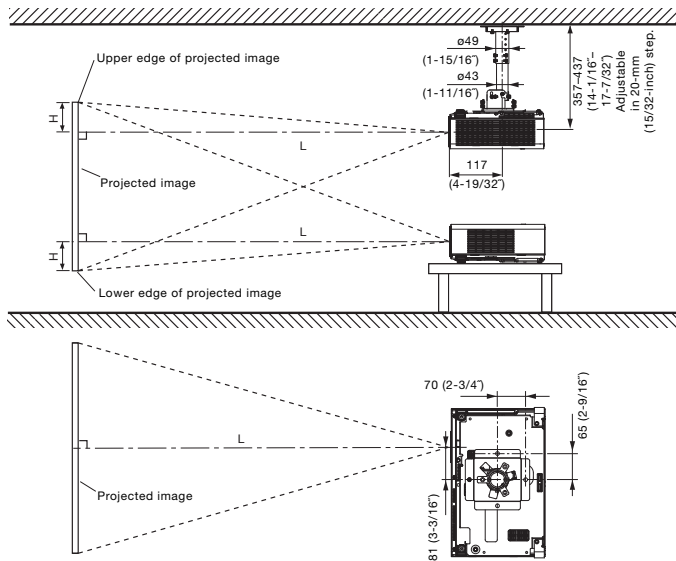

unit : mm (inch)

L: Distance to screen
H: Height from the edge of screen to center of lens

NOTE:

Illustrations show the projector installed using optional ceiling bracket.
This illustration is not drawn to scale.

Projection size (diagonal)	Projection distance (L)		Height from the edge of screen to center of lens (H)
	Min (wide)	Max (telephoto)	
0.84 m / 33"	- / -	1.1 m / 3.7'	0.08 m / 0.28'
1.02 m / 40"	1.1 m / 3.7'	1.4 m / 4.5'	0.10 m / 0.33'
1.27 m / 50"	1.4 m / 4.7'	1.7 m / 5.6'	0.13 m / 0.42'
1.52 m / 60"	1.7 m / 5.6'	2.1 m / 6.8'	0.15 m / 0.50'
1.78 m / 70"	2.0 m / 6.6'	2.4 m / 7.9'	0.18 m / 0.58'
2.03 m / 80"	2.3 m / 7.6'	2.8 m / 9.1'	0.20 m / 0.67'
2.29 m / 90"	2.6 m / 8.5'	3.1 m / 10.2'	0.23 m / 0.75'
2.54 m / 100"	2.9 m / 9.5'	3.5 m / 11.4'	0.25 m / 0.83'
3.05 m / 120"	3.5 m / 11.4'	4.2 m / 13.7'	0.30 m / 1.00'
3.81 m / 150"	4.3 m / 14.3'	5.2 m / 17.1'	0.38 m / 1.25'
5.08 m / 200"	5.8 m / 19.0'	7.0 m / 22.9'	0.51 m / 1.67'
6.35 m / 250"	7.3 m / 23.8'	8.7 m / 28.7'	0.64 m / 2.08'
7.62 m / 300"	8.7 m / 28.6'	10.5 m / 34.4'	0.76 m / 2.50'

* This distance is especially recommended for ceiling-mounted use and other permanent installations.

NOTE:

Values shown are approximate.

The value for L (distance to screen) varies slightly depending on the zoom lens characteristics.

When the shortest projection distance is used, a small amount of distortion may occur in the image due to the zoom lens characteristics.

Calculation of the projection distance

For a screen size different from the above, use the equation below to calculate the projection distance.

Aspect ratio 4 : 3

minimum L (m) = (diagonal screen size in inches) x 0.0292 - 0.036

maximum L (m) = (diagonal screen size in inches) x 0.0351 - 0.044


NOTE: Distances calculated with the above equations will include a slight error.

Installable Angle

Install the projector at an angle within the range shown below.


• **Vertical direction**

The projector may be installed at a vertical angle of $\pm 30^\circ$.

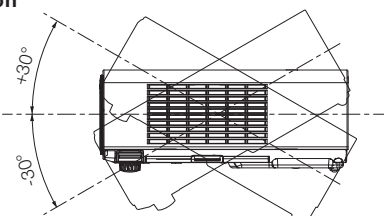

• **Horizontal direction**

The projector may be installed at a horizontal angle of $\pm 10^\circ$.

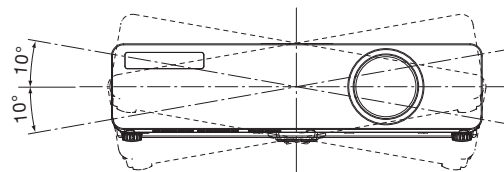

Computer data compatibility

This projector accepts up to 91 kHz horizontal scanning frequency and 193 MHz dot clock.

NOTE: Pixel thinning is applied to signals that exceed a dot clock frequency of 110 MHz. The display resolution of this projector is 1,024 x 768 pixels. Input signals that exceed this resolution will be converted to 1,024 x 768 pixels.

List of compatible signals

Display mode	Display resolution (dots) ¹	Scanning frequency H (kHz)	V (kHz)	Dot clock frequency (MHz)	Picture quality ²	Input terminal
NTSC/NTSC4.43/PAL-M/PAL60	720 x 480i	15.7	59.9	–	A	VIDEO/S-VIDEO
PAL/PAL-N/SECAM	720 x 576i	15.6	50.0	–	A	
525i (480i)	720 x 480i	15.7	59.9	13.5	A	COMPUTER (RGB/YpPr)
625i (576i)	720 x 576i	15.6	50.0	13.5	A	
525p (480p)	720 x 483	31.5	59.9	27.0	A	
625p (576p)	720 x 576	31.3	50.0	27.0	A	
750 (720)/60p	1280 x 720	45.0	60.0	74.3	A	
750 (720)/50p	1280 x 720	37.5	50.0	74.3	A	
1125 (1080)/60i	1920 x 1080i	33.8	60.0	74.3	A	COMPUTER (RGB only)
1125 (1080)/50i		28.1	50.0	74.3	A	
VESA70	640 x 400	31.5	70.1	25.2	A	
VESA85		37.9	85.1	31.5	A	
VGA60	640 x 480	31.5	59.9	25.2	A	
VGA65		35.0	66.7	30.2	A	
VGA72		37.9	72.8	31.5	A	
VGA75		37.5	75.0	31.5	A	
VGA85		43.3	85.0	36.0	A	
SVGA55	800 x 600	35.2	56.3	36.0	A	
SVGA60		37.9	60.3	40.0	A	
SVGA70		48.1	72.2	50.0	A	
SVGA75		46.9	75.0	49.5	A	
SVGA85		53.7	85.1	56.3	A	
MAC16	832 x 624	49.7	74.6	57.3	A	
XGA50	1024 x 768	39.6	50.1	51.9	AA	
XGA60		48.4	60.0	65.0	AA	
XGA70		56.5	70.1	75.0	AA	
XGA75		60.0	75.0	78.8	AA	
XGA85		68.7	85.0	94.5	AA	
WIDE750 (720)	1280 x 720	44.8	59.9	74.5	A	
		37.1	49.8	60.5	A	
WXGA768	1280 x 768	39.6	49.9	65.3	A	
		47.8	59.9	79.5	A	
WXGA800	1280 x 800	41.3	50.0	68.0	A	
		49.1	60.2	69.1	A	
		49.7	59.8	83.5	A	
MXGA70	1152 x 864	64.0	71.2	94.2	A	
MXGA75		67.5	74.9	108.0	A	
MXGA85		76.7	85.0	121.5	B	
MAC21	1152 x 870	68.7	75.1	100.0	A	
MSXGA60	1280 x 960	60.0	60.0	108.0	A	
SXGA60	1280 x 1024	64.0	60.0	108.0	A	
SXGA75		80.0	75.0	135.0	B	
SXGA85		91.1	85.0	157.5	B	
SXGA60+	1400 x 1050	64.0	60.0	108.0	A	
		65.1	59.9	122.4	B	
WXGA+	1440 x 900	55.9	59.9	106.5	A	
UXGA60	1600 x 1200	75.0	60.0	162.0	B	
WSXGA+	1680 x 1050	65.3	60.0	146.3	B	
WUXGA	1920 x 1200	74.6	59.9	193.3	B	

1. The "i" appearing after the resolution indicates an interlaced signal.

2. The following symbols are used to indicate picture quality.

AA Maximum picture quality can be obtained.


A Signals are converted by the image processing circuit before picture is projected.

B Signals are compressed by the image processing circuit before picture is projected.

Serial connector

The serial connector complies with RS-232C. To control the projector from a personal computer, commands must be input through communication software, based on the format and satisfying the communication conditions shown below.

Pin assignments and signal names

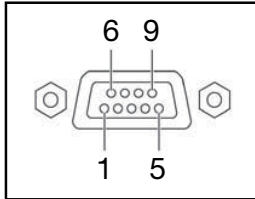

D-sub HD 9-pin, female


No.	Signal name	Description	No.	Signal name	Signal name
1	–	NC	6	–	NC
2	TXD	Send data	7	CTS	Connected internally
3	RXD	Receive data	8	RTS	Connected internally
4	–	Connected internally	9	–	NC
5	GND	Ground			

Communication conditions (factory setting)

Signal level	RS-232C-compliant
Synchronization method	Start-stop synchronization
Baud rate	9,600 bps
Parity	None
Character length	8 bits
Stop bit	1 bit
X parameter	None
S parameter	None

Basic format

Transmission from the computer begins with STX, then the ID, command, parameter, and ETX are sent in this order. Add parameters according to the details of control.

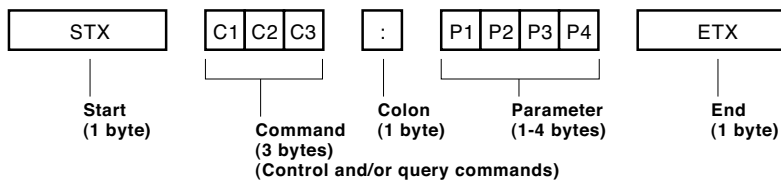

CAUTION

It may not be possible to send or receive commands for about 10 to 60 seconds when the lamp is first turned on. If this occurs, wait for 60 seconds, then try sending or receiving again. When sending multiple commands, be sure to wait for at least 0.5 second after receiving a response from the projector before sending the next command. Additional time is sometimes required for response due to processing inside the projector. Set the time-out period for command response to 10 seconds or more.

NOTE:

If a wrong command is received, the projector will send an ER401 command to the computer. When sending commands without parameters, a colon (:) is not necessary.

Cable specifications

Projector			PC (DTE)		
1	NC	NC	1		
2			2		
3			3		
4	NC	NC	4		
5			5		
6	DSR	NC	6		
7			7		
8			8		
9	NC	NC	9		

Control commands

Command: <Parameter>	Function	Callback: <Parameter>	Parameter value	
			Min	Max
PON* ^{1/2}	Power on (standby mode on)	PON* ^{1/2}	–	–
POF* ^{1/2}	Power off (standby mode off)	POF* ^{1/2}	–	–
AVL:<pl>	Volume control	AVL:<pl>	0	63
IIS:<input signal>	Input signal selection	IIS:<input signal>	–	–
OST	The same function as “default” button	OST	–	–
OFZ:<off on>	Freeze	OFZ:<off on>	0	1
OEN	Enter	OEN	–	–
OXG:0	Wide mode: Off	OXG:0	–	–
OXG:1	Wide mode: On	OXG:1	–	–
OXG:2	Wide mode: Auto	OXG:2	–	–
VPM:<NAT>	Picture mode: Natural	VPM:<NAT>	–	–
VPM:<STD>	Picture mode: Standard	VPM:<STD>	–	–
VPM:<DYN>	Picture mode: Dynamic	VPM:<DYN>	–	–
VPM:<BBD>	Picture mode: Blackboard	VPM:<BBD>	–	–
VPM:<WBD>	Picture mode: Whiteboard	VPM:<WBD>	–	–
VXX:DLVI0=<+00000>	Daylight View: Off	VXX:DLVI0=<+00000>	–	–
VXX:DLVI0=<+00001>	Daylight View: Auto	VXX:DLVI0=<+00001>	–	–
VXX:DLVI0=<+00002>	Daylight View: On	VXX:DLVI0=<+00002>	–	–
AUU	Volume up	AUU	–	–
AUD	Volume down	AUD	–	–
OMN	Menu	OMN	–	–
OCU	Cursor up	OCU	–	–
OCD	Cursor down	OCD	–	–
OCL	Cursor left	OCL	–	–
OCR	Cursor right	OCR	–	–
OAS	Auto setup	OAS	–	–
OSH* ¹	AV mute	OSH* ¹	–	–
OIX	Index window	OIX	–	–
DZU	Digital zoom: Enlargement	DZU	–	–
DZD	Digital zoom: Reduction	DZD	–	–

*1 Do not send PON, POF, or OSH commands continuously in a short period of time. Doing so may burst the lamp or shorten the lamp replacement cycle.

*2 When a command other than OSH is sent while the shutter function is operating, the projector will send an ER401 command in reply and release the shutter function.

Status asking commands

Command	Description	Callback <Parameter>
QPW	Standby power status	<power condition>
QSS	Lamp status	<lamp condition>
QIN	Input signal status	<input signal>
QAV	Volume adjustment value	<p1>
QVC	Color adjustment value	<p1>
QVT	Tint adjustent value	<p1>
QVB	Brightness adjustment value	<p1>
QVR	Contrast adjustment value	<p1>
QVS	Sharpness adjustment value	<p1>
QWR	White balance: R adjustment value	<p1>
QWG	White balance: G adjustment value	<p1>
QWB	White balance: B adjustment value	<p1>
QHP	Horizontal position adjustment value	<p1>
QVP	Vertical position adjustment value	<p1>
QCP	Clock phase adjustment value	<p1>
QDC	Dot clock adjustment value	<p1>
QSP	Projection method status	<p1>
QLG	On-screen menu language	<p1>
QXG	Wide mode status Off	<0>
	On	<1>
	Auto	<2>
QVX : DLVI 0	Daylight View status Off	<+00000>
	Auto	<+00001>
	On	<+00002>
QPM	Picture mode status Natural	<NAT>
	Standard	<STD>
	Dynamic	<DYN>
	Blackboard	<BBD>
	Whiteboard	<WBD>
QFZ	Freeze status	<off on>
QSL	Lamp run time	<acctch>
QSH	Shutter function status	<off on>
QKS	Keystone correction status	<p1>
QTE	Color temperature adjustment status	<color temp>

Parameter format

Parameter format	Size (Byte)	Definition
<p1>	3 (1 or 2 bytes also possible when under control)	Decimal without signs: 0 to 999 (000, 001, 002...999) Decimal with signs: -99 to +99 (-99...-01, +00, +01, +02...+99) Callback from the projector is 3 Byte.
<off on>	1	0 = off, 1 = on
<input signal>	3	RG1 = computer 1, RG2 = computer 2, VID = video, SVD = S-Video
<installation>	1	0 = front, 1 = rear, 2 = ceiling and front, 3 = ceiling and rear
<language>	3	ENG = English, DEU = German, FRA = French, ESP = Spanish, ITL = Italian, JPN = Japanese, CHI = Chinese, POR = Portuguese, SVE = Swedish, NOR = Norwegian, DAN = Danish, POL = Polish, CES = Czech, MAG = Hungarian, RUS = Russian, THA = Thai, KOR = Korean
<power condition>	3	000 = power off (standby mode off), 001 = power on (standby mode on)
<lamp condition>	1	0 = standby, 1 = lamp on under control, 2 = lamp off, 3 = lamp off under control
<acctch>	4	Decimal without signs: 0000-9999 hours
<color temp>	1	0 = economy, 1 = normal, 2 = high
<date>	8	y1y2y3y4m1m2d1d2w = year (y) month (m) day (d) day of week (w) Day of week: Monday = 1, Tuesday = 2, ... Sunday = 7
<time>	6	h1h2m1m2s1s2 = hour (h) minute (m) second (s)

NOTE: If a wrong command is received, the projector will send an ER401 command to the computer.

Command example

To set the volume to +30, send the command as shown right.






NOTE: When sending commands without parameters, a colon (:) is not necessary.

STX	AVL	:	30	ETX
Start	Command		Parameter	End

Notes on projector placement and operation

The projector uses a high-wattage lamp that becomes very hot during operation. Please observe the following precautions.

1. Never place objects on top of the projector while it is operating.
2. Make sure there is an unobstructed space of 500 mm (19-11/16") or more around the projector's exhaust openings.
3. If the projector is placed in a box or enclosure, ensure the temperature of the air surrounding the projector is between 0°C/32°F and 35°C/95°F. Also make sure the projector's intake and exhaust openings are not blocked. Take particular care to ensure that hot air from the exhaust openings is not sucked into the intake openings.

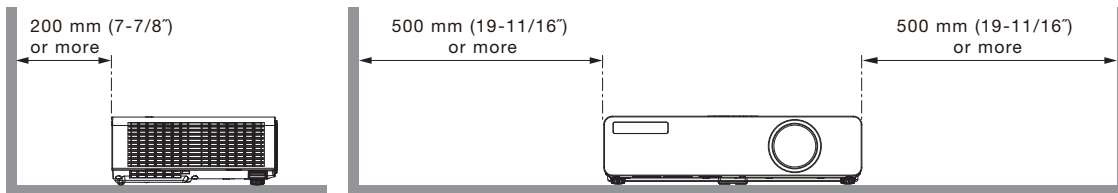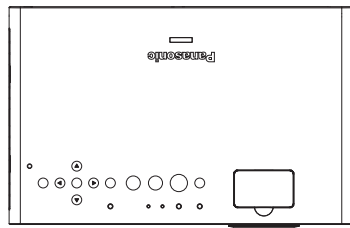**Direction of air intake and exhaust****Operating the projector continuously**

1. If the projector is to be operated continuously 10 hours or more, lamp replacement cycle duration becomes shorter.
2. The lamp replacement cycle duration becomes shorter if the projector is operated repeatedly for short periods (one hour or less).

Weights and dimensions shown are approximate. Specifications are subject to change without notice. This product may be subject to export control regulations. Intel and Pentium are registered trademarks of Intel Corporation. Microsoft, Windows Vista and Windows are either registered trademarks or trademarks of Microsoft Corp. in the United States and/or other countries. Apple, Mac, Mac OS, Macintosh and Safari are trademarks of Apple Inc., registered in the U.S. and other countries. All other trademarks are the property of their respective trademark owners. Projection images simulated.